




Key Features

- Indoor IR PTZ Camera
- Support intelligent 3D positioning with DH-SD protocol
- Day/night auto switch

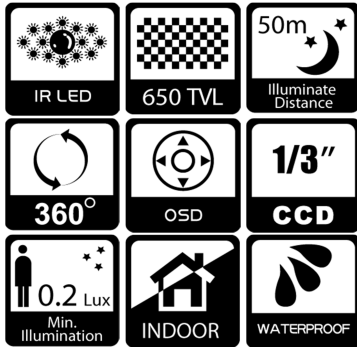

Features	VAZ-XN405
Camera	
Pan Rotation Speed	0.1°-50°/s
Pan Rotation Range	360°
Tilt Rotation Range	94°
Horizontal Resolution	650 TVL
Zoom	10x optical zoom
Auto Flip	Horizontal 180°, Vertical 90°
Auto control IR LED	PWM
A-B Scan	User programmable
A-B Scan Speed	01~64 grade selectable
Dwell Preset	05-60s
Preset Points	128
Go to Preset Speed	50°/s
Guard Tours	3 groups
Guard Points	Max.16 points, dwell time user selectable 02~60S
Park Action	Home position, 360° scan/A-B scan/guard tour 1-3
Park Time	1-60mins available
PWR on Action	Memory as power off/360° scan/A-B scan/guard tour1-3
Ambient light detection	Support
IR Illumination On	1-15 grads selectable
Communication Protocol	PELCO- D/P with DH-SD protocol
Communication	RS485
Baud Rate	1200/2400/4800/9600bps
Operating Temperature	Indoor : 0°~ +40°
Operating humidity	≤95% Non Condensing
Heater & Blower	Auto temperature control
Power	DC12 ≤3A
IR Illumination Distance	up to 50 meters
Power Consumption	≤ 20W
Lightning protection	transient voltage 3000V
Compatible camera	SONY, LG, CNB, SAMSUNG, HITACHI
LED Angle of Illumination	Ø16=2

Distributed by

"We do not inherit the earth from our ancestors, we borrow it from our children" Saint Exupéry
 © 2013 VisioSS. All rights reserved. Reproduction of all or part of this document without permission is prohibited. Features and specifications are subject to change without notice.

