




Key Features



- Outdoor IR PTZ Camera
- Support intelligent 3D positioning with DH-SD protocol
- Day/night auto switch

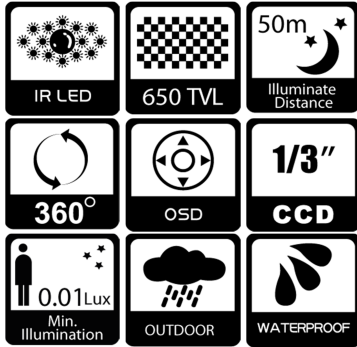

Name and Description		VAZ-XN605
Camera		
Horizontal Rotation Speed		0.02 ~ 200°/s
Tilt Rotation Speed		0.02 ~ 80°/s
Horizontal Rotation Range		360°
Tilt Rotation Range		93°
Optical Zoom		10x
Horizontal Resolution		650 TVL
Auto Flip		Horizontal 180°, Vertical 93°
Ratio Speed		Support
Auto Control IR LED		PWM
360° Scan		1-9 grades setting available
A-B Scan		User programmable
A-B Scan Speed		1-9 grades setting available
PWR on Action		Tour 1/360 scan/A-B scan/Preset 1-8/None
Park Time		1-60 mins setting available
Dwell Preset		1-60s interval available
Preset Points		220
Go to Preset Speed		200°/s
Guard Tours		3 groups
Guard Points		Max.16 points, dwell time user selectable
Communication Protocol		Pelco-D, Pelco-P with DH-SD protocol
Communication		RS485
Baud Rate		1200/2400/4800/9600bps
Operating Temperature		Indoor: 0°~ +40° Outdoor: -40°~ +60°
Operating Humidity		≤95% Non Condensing
Heater & Blower		Auto temperature control
Power		DC12V3A
IR Illumination Distance		50M
Power Consumption		≤ 15W
Lightning Protection		Transient voltage 6000V
IR LED		6 pcs (42 mils/ array led)

Distributed by

"We do not inherit the earth from our ancestors, we borrow it from our children" Saint Exupéry
 © 2013 VisioSS. All rights reserved. Reproduction of all or part of this document without permission is prohibited. Features and specifications are subject to change without notice.

